


PNEUMATIC TYPE TERMINAL CRIMPING MACHINE

JG-FEK-5ND

- Multiple purpose, it can crimp different terminals with different crimping die sets.
- The common type or pressure protected type foot switches are for selection. The machine is equipped with pressure regulator to ensure precise crimping.
- Light, portable, easy and quick crimping to ensure high efficiency operation. It can crimp about 1200 times per hour.

Crimping range	Insulated terminal, 6.0mm ²
Air pressure range	0.5-0.6MPa 34L/min
Output	1.3T(0.5MPa 时 at 0.5MPa)
Overall dimension	230×187×100mm
Weight	5.53Kg

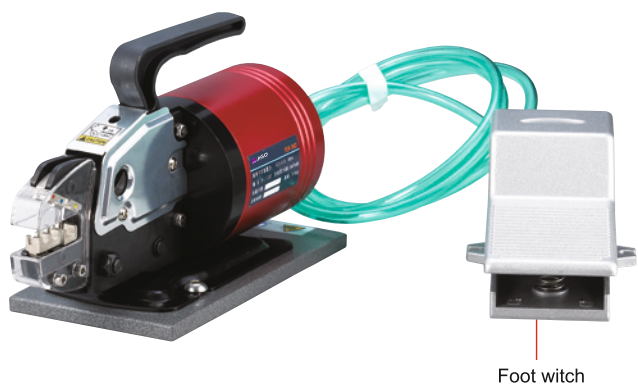

	Ferrules 0.25-35mm ²
	TWIN Twin ferrules, 2×0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0mm ²
	Insulated O type or Y type terminals 1.0, 2.0, 2.5, 4.0, 6.0mm ²
	Non-insulated O type or Y type terminals 0.5, 1.0, 1.5, 2.0, 2.5, 4.0, 6.0, 10.0mm ²
	Males or females receptacles 1.0, 2.0, 2.5, 4.0, 6.0mm ²
	Contact pin for rectangular connector 1.0, 2.0, 4.0mm ²

