


UT205A+/UT206A+/UT205B

1000A Digital Clamp Meters

The UT205A+/UT206A+/UT205B 1000A digital clamp meter has a lightweight and slim design, and the screen backlight function enables normal use in dark environments. The clamp meter has reliable performance and is suitable for electronic and electrical maintenance. The rich functions make the meter suitable for more different usage scenarios.

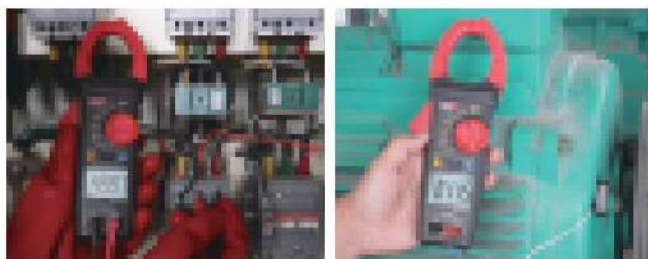

Features	
Non-contact voltage (UT206A+)	Auto power off
Jaw opening 45mm	Inrush current (UT206A+)
Flashlight	MAX/MIN
Data hold	Temperature (UT206A+)
Resistance	Capacitance



UT205A+

UT206A+

Specifications		UT205A+	UT205B	UT206A+
AC current (A)	1000A	$\pm(1.5\%+5)$	$\pm(1.5\%+5)$	$\pm(1.5\%+5)$
Inrush current (A)	600A			$\pm(5\%+10)$
AC voltage (V)	1000V	$\pm(1.0\%+2)$	$\pm(1.0\%+2)$	$\pm(1.0\%+2)$
ACV frequency (Hz)	10Hz~10kHz	$\pm(1.0\%+5)$	$\pm(1.0\%+5)$	$\pm(1.0\%+5)$
DC voltage (V)	1000V	$\pm(0.7\%+3)$	$\pm(0.8\%+2)$	$\pm(0.7\%+3)$
Resistance (Ω)	40M Ω 60M Ω	$\pm(0.8\%+2)$	$\pm(2.5\%+5)$	$\pm(0.8\%+2)$
Capacitance (F)	40mF 60mF	$\pm(4\%+5)$	$\pm(10\%)$	$\pm(4\%+5)$
Frequency (Hz)	10Hz~10MHz	$\pm(0.1\%+4)$	$\pm(0.1\%+4)$	$\pm(0.1\%+4)$
Temperature ($^{\circ}\text{C}/^{\circ}\text{F}$)	-40 $^{\circ}\text{C}$ ~1000 $^{\circ}\text{C}$ /-40 $^{\circ}\text{F}$ ~1832 $^{\circ}\text{F}$			$\pm 4^{\circ}\text{C}/\pm 5^{\circ}\text{F}$
Display count		4099	4099	6099
Jaw opening		45mm	55mm	45mm
Overvoltage category	CAT II 1000V/CAT III 600V			

Characteristics	
Standard accessories	Test leads, batteries, point contact temperature probe(UT206A+ only), English manual
Power	1.5V x 2
Product size	240 x 76 x 40 mm
Product net weight	240g
Standard individual packing	Gift box, carrying bag
Standard quantity per carton	20pcs
Standard carton measurement	420 x 290 x 280mm