


TIME RELAY

AH3-1/2/3

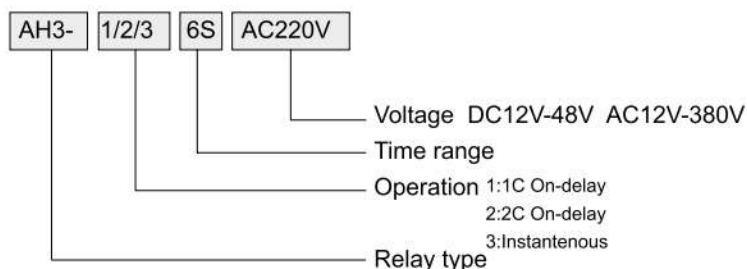

JG-AH3-3

Specification

Voltage	DC12V-48V AC12V-380V50HZ
Power expend	DC1.0W AC1.0VA
Control output	5A220VAC
Insulation Resistance	DC500V 100MΩ
Dielectric Strength	BCC1500VAC BOC1000VAC
Operating Temperature	-10℃~50℃
Humidity	35%~85%
Life	Mech:10 ⁷ Elec:10 ³
Weight	≈ 160g

Time range

Nominal Time	Time range	Nominal Time	Time range
1s	0.1S~1S	6m	0.3m~6m
2s	0.1S~2S	12m	0.6m~12m
3s	0.1S~3S	30m	1m~30m
6s	0.2S~6S	60m	2m~60m
10s	0.6S~10S	3h	0.1h~3h
30s	1.0S~30S	6h	0.2~6h
60s	2.0S~60S	10h	0.25~10h
2m	5.0S~2m	24h	0.8~24h
3m	0.1m~3m	30h	1~30h

Dimension.Bottom View

