

OVERVOLTAGE AND UNDERVOLTAGE PROTECTOR



JG-NP3-V 63A


Technical Data

Rated supply voltage	AC 220V	Operation voltage range	AC 80V~350V
Rated frequency	50/60Hz	Overvoltage(>U)setting Range	230~300V
Undervoltage(>U)setting Range	210~140V	Rated Current	40/63A(subject to protect label)
>U And <U Trip Delay	0.5S	Reset/Start Delay	1~600S
Voltage measurement accuracy	2%(Not exceeding 2% of the overall range)	Rated Insulation Voltage	400V
Output contact	1NO	Electrical life	10 ⁵
Mechanical life	10 ⁵	Protection Degvree	IP20
Pollution Degree	3	Altitude	≤2000m
Operating temperature	-50℃ ~ 55℃	Humidity	≤50%at40 ℃ (without condensation)
Storage temperature	-30℃ ~ 70℃		

Default Setting

Technical Parameter	Setting range	Step	Factory Setting
Over-Voltage Protection Value	230~300V	1V	280V
Under-Voltage Protection Value	210~140V	1V	160V
Recovery delay time	1~600s	1s	5s

Function Setting

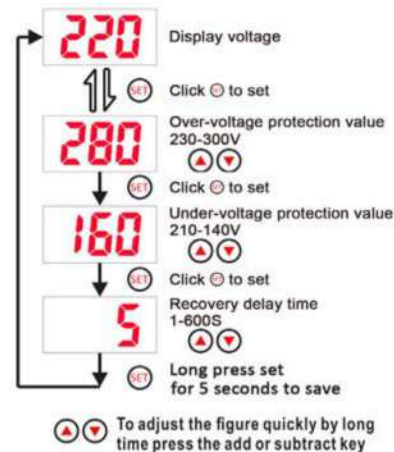

Wiring and shape dimensions

