

OVERCURRENT AND UNDER CURRENT PROTECTOR



JG-NP3-A 63A

Technical Data



Rated supply voltage	AC 220V	Operation voltage range	AC 80V~350V
Rated frequency	50/60Hz	Electric current setting range	1~40/63A
Rated Current	40/63A(subject to protect label)	>U And <U Trip Delay	0.5S
Reset/Start Delay	1~600S	Voltage measurement accuracy	1%(Not exceeding 2% of the overall range)
Rated Insulation Voltage	400V	Output contact	1NO
Electrical life	10 ⁵	Mechanical life	10 ⁵
Protection Degvree	IP20	Pollution Degree	3
Altitude	≤2000m	Operatintg temperature	-50℃ ~ 55℃
Humidity	≤50%at40 ℃ (without condensation)	Storage temperature	-30℃ ~ 70℃

Default Setting

Technical Parameter	Setting range	Step	Factory Setting
Over-Current protection value	1~40/63A	0.1A	40/63A
Recovery delay time	1~600s	1S	5S
Continuous overcurrent protect times	A01~A20/oFF	A01	oFF


Function Setting

Wiring and shape dimensions

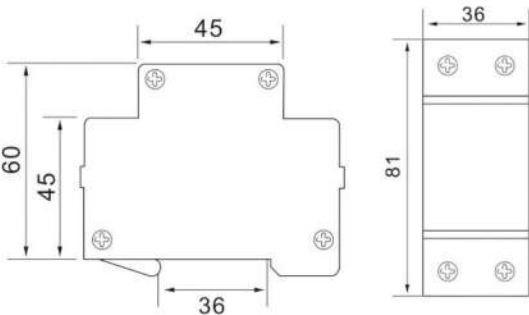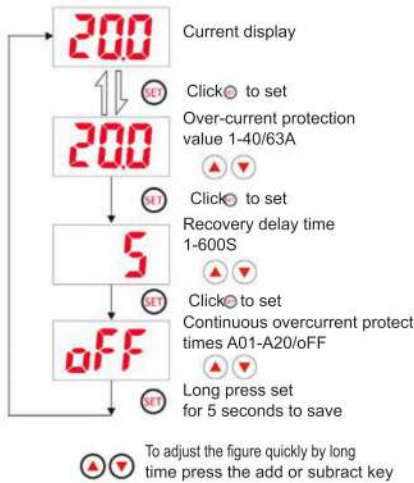

OVERCURRENT AND UNDER CURRENT PROTECTOR

Function Setting

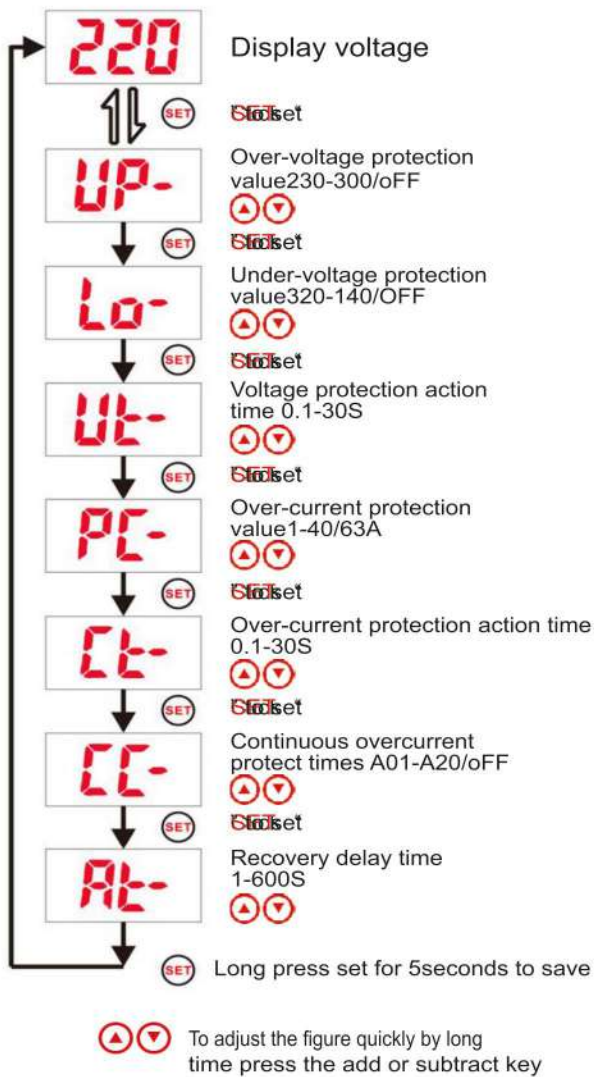

Wiring and shape dimensions

