

OVER AND UNDER VOLTAGE + CURRENT PROTECTOR




JG-NP4-VA

Technical Data

Rated supply voltage	AC 220V	Operation voltage range	AC 80V~400V(single phase)
Rated frequency	50/60Hz	Electric current(>A) setting range	1~40/63A
Overvoltage(>U)setting Range	230~300V	Undervoltage(>U)setting Range	210~140V
Rated Current	40/63A(subject to protect label)	>U And <U Trip Delay	0.5S
Reset/Start Delay	1~600S	Voltage measurement accuracy	3%(Not exceeding 3% of the overall range)
Rated Insulation Voltage	400V	Output contact	1NO
Electrical life	10 ⁵	Mechanical life	10 ⁵
Protection Degvree	IP20	Pollution Degree	3
Altitude	≤2000m	Operatintg temperature	-50℃ ~ 55℃
Humidity	≤50%at40 ℃ (without condensation)	Storage temperature	-30℃ ~ 70℃

Function Setting

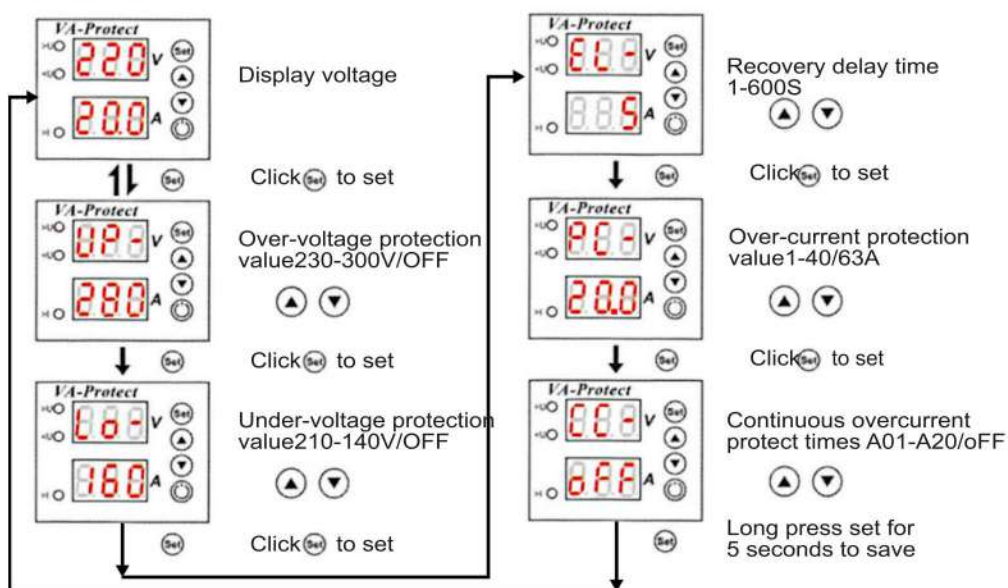

▲ ▼ To adjust the figure quickly by long time press the add or subtract key