

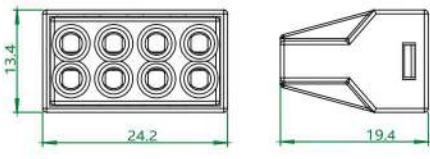

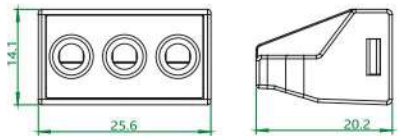



PCT-10 Series

 PCT-102		 PCT-108	
 PCT-104		 PCT-103D	
 PCT-106		 PCT-104D	

TECHNICAL PARAMETER

Model	PCT-102	PCT-104	PCT-106	PCT-108	PCT-103D	PCT-104D
Appearance Specification						
Reference standard	IEC	IEC	IEC	IEC	IEC	IEC
Rated voltage	250V	250V	250V	250V	250V	400V
Rated current	24A	24A	24A	24A	41A	41A
Wired iameter	0. 5~2.5mm ²	0. 5~4mm ²	0. 5~2.5mm ²	0. 5~2.5mm ²	0. 5~6mm ²	0. 5~6mm ²
Voltage resistance	4kV	4kV	4kV	4kV	4kV	4kV
Mechanical properties						
Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
Strip length	10-12mm	10-12mm	10-12mm	10-12mm	10-12mm	10-12mm
L/W/H	19.6×9.1×12.9	19.4×13×13.4	19.4×18.6×13.4	19.4×24.2×13.4	20.2×25.6×14.1	20.2×33.5×14.1
The number of poles	2P	4P	6P	8P	3P	4P
Lid colour						
Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
Shrapnel	S301	S301	S301	S301	S301	S301
Conductor material	T2	T2	T2	T2	T2	T2

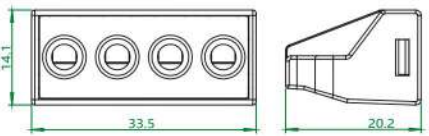

0. 5~2.5mm²
250V/4kV/24A
0. 5~6mm²
400V/4kV/41A

