


PCT-2 Series



TECHNICAL PARAMETER

Model	PCT-212	PCT-213	PCT-214	PCT-215	PCT-218
Appearance Specification					
Reference standard	IEC	IEC	IEC	IEC	IEC
Rated voltage	250V	250V	250V	250V	250V
Rated current	32A	32A	32A	32A	32A
Wire diameter	0.5~4mm ²	0.5~4mm ²	0.5~4mm ²	0.5~4mm ²	0.5~4mm ²
Voltage resistance	4kV	4kV	4kV	4kV	4kV
Mechanical properties					
Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
Strip length	11-12mm	11-12mm	11-12mm	11-12mm	11-12mm
L/W/H	21.2×12.5×14.5	21.2×17.1×14.5	21.2×21.7×14.5	21.2×26.4×14.5	21.2×40.2×14.5
The number of poles	2P	3P	4P	5P	8P
Lever colour					
Plastic parts	PA6	PA6	PA6	PA6	PA6
Shrapnel	S301	S301	S301	S301	S301
Conductor material	T2	T2	T2	T2	T2

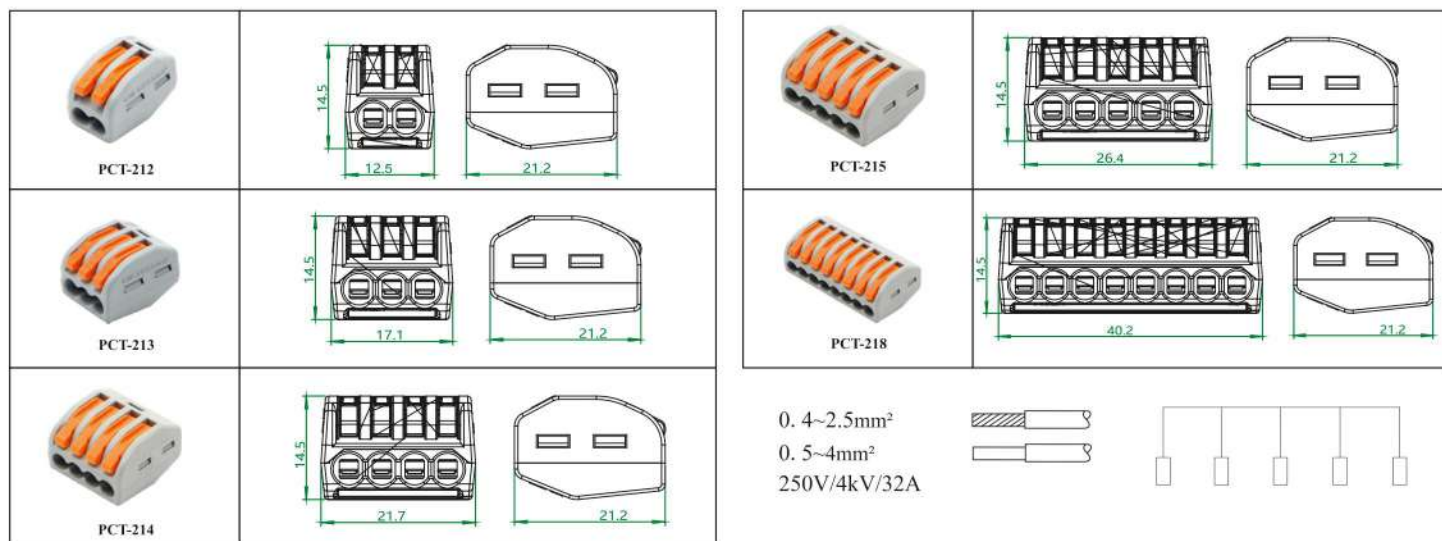