





PCT-25 Series

 PCT-252		 PCT-254	
 PCT-253		 PCT-255	

TECHNICAL PARAMETER

Model	PCT-252	PCT-253	PCT-254	PCT-255
Appearance Specification				
Reference standard	IEC	IEC	IEC	IEC
Rated voltage	450V	450V	450V	450V
Rated current	24A	24A	24A	24A
Wired iameter	0.5~4mm ²	0.5~4mm ²	0.5~4mm ²	0.5~4mm ²
Voltage resistance	4kV	4kV	4kV	4kV
Mechanical properties				
Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
Strip length	10-12mm	10-12mm	10-12mm	10-12mm
L/W/H	19.9×10.15×10	19.9×13.8×10	19.9×17.45×10	19.9×21.1×10
The number of poles	2P	3P	4P	5P
Lid colour	●	●	●	●
Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
Shrapnel	S301	S301	S301	S301
Conductor material	T2	T2	T2	T2

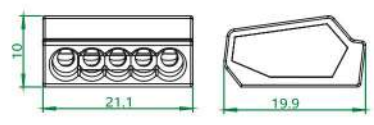

First Step
strip the wire 10-12mm



Second Step
Plug the wire completely into the connector.

0.5~4mm²
450V/4kV/24A

