
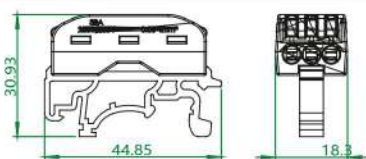


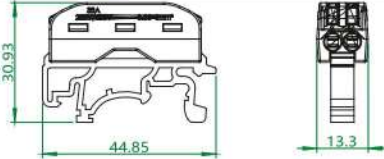
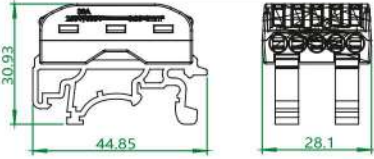



PCT-2 Series

 PCT-211D		 PCT-223D	
 PCT-211		 PCT-224D	
 PCT-222D		 PCT-225D	

0. 4~2.5mm²

0. 5~4mm²

250V/4kV/32A



TECHNICAL PARAMETER

Model	PCT-211D	PCT-211	PCT-222D	PCT-223D	PCT-224D	PCT-225D
Appearance Specification						
Reference standard	IEC	IEC	IEC	IEC	IEC	IEC
Rated voltage	250V	250V	250V	250V	250V	250V
Rated current	32A	32A	32A	32A	32A	32A
Wired iameter	0. 5~4mm ²	0. 5~4mm ²	0. 5~4mm ²	0. 5~4mm ²	0. 5~4mm ²	0. 5~4mm ²
Voltage resistance	4kV	4kV	4kV	4kV	4kV	4kV
Mechanical properties						
Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
Strip length	11-12mm	11-12mm	11-12mm	11-12mm	11-12mm	11-12mm
L/W/H	47.3×31×8	42.8×8×30.5	44.8×13.3×30.9	44.8×18.3×30.9	44.8×23.15×30.9	44.8×28.1×30.9
The number of poles	1P	1P	2P	3P	4P	5P
Lever colour						
Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
Shrapnel	S301	S301	S301	S301	S301	S301
Conductor material	T2	T2	T2	T2	T2	T2



First Step

Strip the wire 11-12mm



Second Step

Dismantle the orange operation handle straight and plug the wire into the hole.



Third Step

Push the lever horizontally to clip the wire for brake.