



LT-22 Series

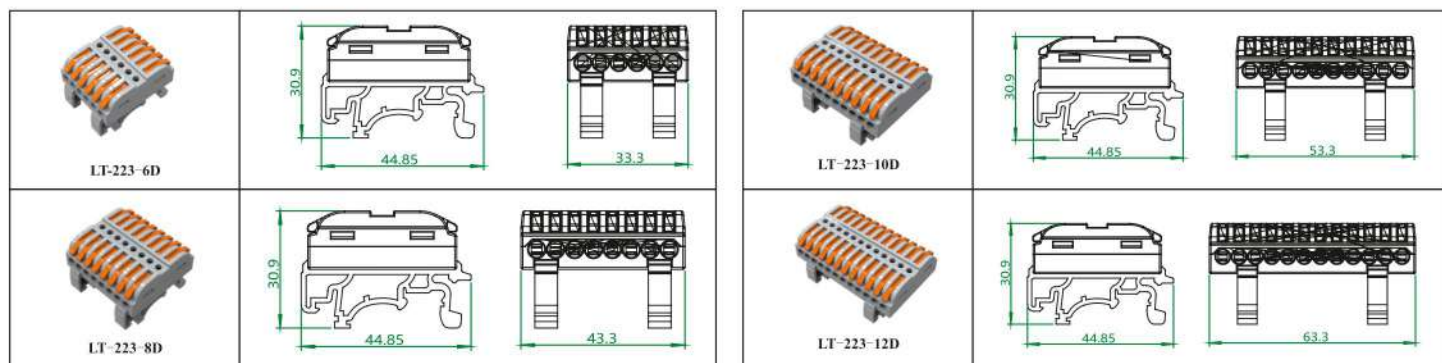

0.4~2.5mm²

0.5~4mm²

250V/4kV/32A



TECHNICAL PARAMETER

Model	LT-223-6D	LT-223-8D	LT-223-10D	LT-223-12D
Appearance Specification				
Reference standard	IEC	IEC	IEC	IEC
Rated voltage	250V	250V	250V	250V
Rated current	32A	32A	32A	32A
Wire diameter	0.5~4mm ²	0.5~4mm ²	0.5~4mm ²	0.5~4mm ²
Voltage resistance	4kV	4kV	4kV	4kV
Mechanical properties				
Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
Strip length	11-12mm	11-12mm	11-12mm	11-12mm
L/W/H	44.8×33.3×30.9	44.8×43.3×30.9	44.8×53.3×30.9	44.8×63.3×30.9
The number of poles	6P	8P	10P	12P
Lever colour				
Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
Shrapnel	S301	S301	S301	S301
Conductor material	T2	T2	T2	T2

