



LT-Series

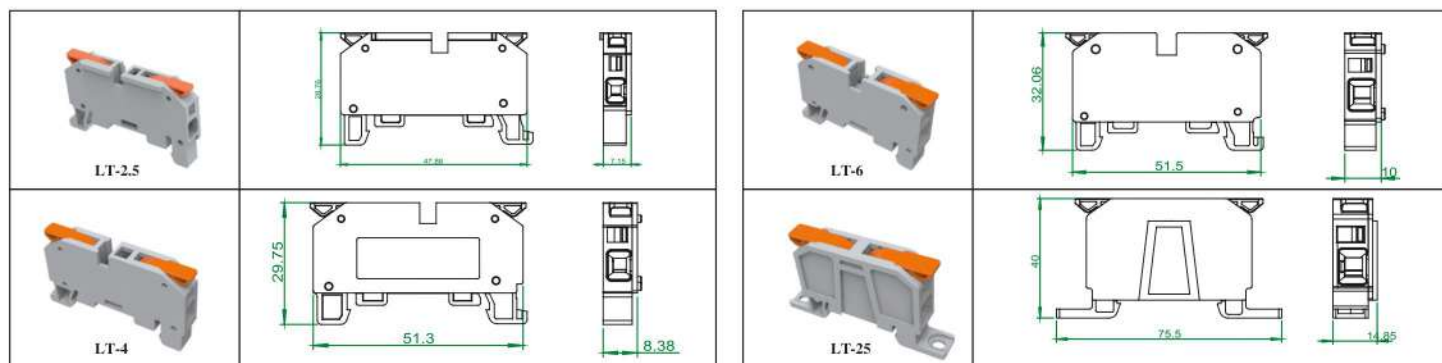

$1 \sim 10\text{mm}^2$

$1 \sim 25\text{mm}^2$

600V/4kV/50A



TECHNICAL PARAMETER

Model	LT-2.5	LT-4	LT-6	LT-25
Appearance Specification				
Reference standard				
Rated voltage	450V	600V	600V	600V
Rated current	32A	50A	50A	50A
Wire diameter	1-4mm ²	1-6mm ²	6-10mm ²	10-25mm ²
Voltage resistance	4kV	4kV	4kV	4kV
Mechanical properties				
Ambient temperature	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
Strip length	11-12mm	11-12mm	11-12mm	11-12mm
L/W/H	47.9×7.1×28.7	51.3×8.4×29.7	51.5×10×32	75.5×14.8×40
The number of poles	1P	1P	1P	1P
Lever colour				
Plastic parts	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2	PC,UL94,V-2
Shrapnel	S301	S301	S301	S301
Conductor material	T2	T2	T2	T2

First Step

Strip the wire 12-14mm

Second Step

Dismantle the orange operation handle straight and plug the wire into the hole.

Third Step

Push the lever horizontally to clip the wire for brake.