

TEMPERATURE CONTROLLER TC-29



TECH SPECS

Model	TC-29
Dimension (HxWxD) mm	72 x 72 x 45
Panel Cutout	68 x 68
Input	J/K or PT-100 2W/3W (Factory Set)
Range	J: 400° C, K: 1200° C PT-100 2 Wire or 3 Wire (0° C to 400° C, -50.0° C to 200.0° C) (Any one factory set)
Output	1 Relay 1 C/O, 5A, 230V AC (Resistive Load) or SSR (Factory Set)
Control Action	TP / ON-OFF (Factory Set)
Power Supply	230V AC $\pm$ 10%,50Hz

APPLICATIONS

Packaging Machinery

Extrusion Machinery

Furnace & Boilers

Ovens & Incubators

Food Industry

Technical Specifications

Input	
Input Type	Thermocouple : (J, K) PT-100 2 Wire or 3 Wire (Factory Set)
Display Range	Refer (Table 1)
Accuracy	± 1% of FSD
ADC Resolution	10 Bits
Display Resolution	Thermocouple : 1 °C RTD : 1 °C
Sample Rate	6 Sample / Sec
CJC Error	± 2 °C
Sensor Open	All Input
Sensor Burnout Current	1.10uA
RTD Excitation Current	0.2mA
CMRR	>120 db (Typical)
Input Impedance	>1M
Max Voltage	20V DC

Physical	
	TC-29
Enclosure	Molded ABS
Color	Black
Front Bezel (mm)	72 x 72
Panel cutout (mm)	68 x 68
Depth behind panel	45 mm
Accessories	1 pair of Mounting clamp
Terminal Cable Size	Barrier Type terminal Cable Size (2.5 mm ²)

Power Supply	
Standard	230V AC, ±10%,50Hz
Consumption	3VA

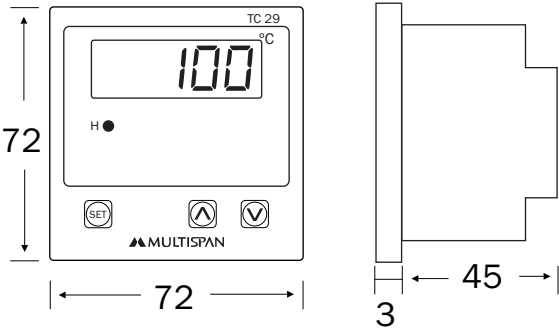

Output	
Control Output	
Control Type	On-Off, TP
Relay Control Output	
Relay	1 Nos.
Rating	5A @230V AC / 28V DC Resistive Load
SSR Control Output	
Rating	12V DC @30mA

Display	
Process Value	4 Digit 7 seg 0.56",RED LED Display
Keys	SET, UP, DOWN
LED Indication	Relay

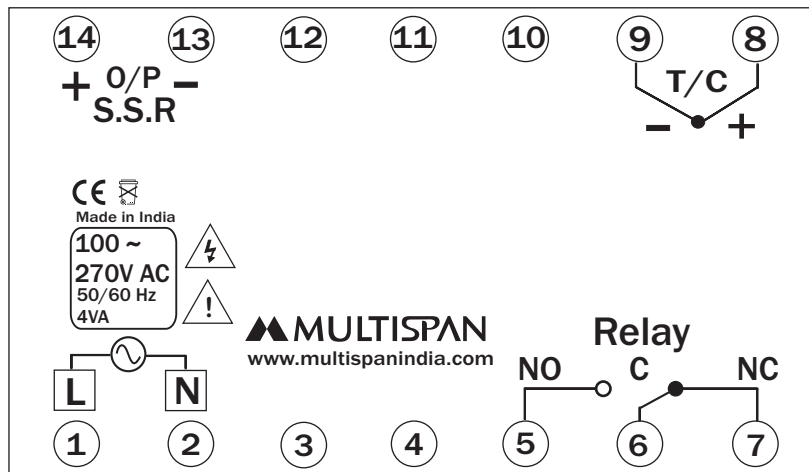
Environmental	
Operating Temperature	0 to 55 °C
Storage Temperature	0 to 70 °C
Humidity	95% RH Non-condensing
Protection	IP 54 (Front Side)

Table 1 (Sensor Range)	
J	0 to 400 °C
K	0 to 1200 °C
PT-100 2 Wire or 3 Wire	0 to 400 °C, -50.0 to 200.0 °C

Mechanical Dimension

Outline Dimension (mm)	Panel Cutout Dimension (mm)
	

Connection Diagram



Multispan reserves the right to change specifications without prior notice. Printing and typographical errors reserved.
Product improvement and upgrade is a constant procedure. So for more updated operating information & support contact us.

Multispan Control Instruments Pvt. Ltd.

72/B, Phase 1, GIDC Estate, Vatva, Ahmedabad-382445, Gujarat, India.

+91-7575805463/7623001206

support@multispanindia.com

Follow us



www.multispanindia.com