

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



High-current connector with bolt connection, screw thread: M8, load current max.: 232 A, connection cross section up to 95 mm² copper and 120 mm² aluminum

Commercial data

Item number	2130214
Packing unit	10 pc
Minimum order quantity	10 pc
Sales key	BE4
Product key	BE4412
GTIN	4055626016054
Weight per piece (including packing)	99.99 g
Weight per piece (excluding packing)	99.99 g
Country of origin	IN

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Technical data

Product properties

Product type	Bolt connection terminal block
Number of connections	2
Number of rows	1
Potentials	1

Insulation characteristics

Overvoltage category	III
Degree of pollution	3

Electrical properties

Rated surge voltage	8 kV
---------------------	------

Connection data

Nominal cross section	95 mm ²
Screw thread	M8
Tightening torque	6 Nm 15 ... 20 Nm
Stripping length	The stripping length depends on the specification provided by the cable lug manufacturer.
Connection in acc. with standard	IEC 60947-7-1
Nominal current	232 A
Maximum load current	232 A (with 95 mm ² conductor cross section)
Nominal voltage	1000 V
Nominal cross section	95 mm ²

Cable lug connection DIN 46234:1980-03

Connection in acc. with standard	DIN 46234:1980-03
Cross section	25 mm ² ... 95 mm ²
Cross section range AWG	4 ... 000 (converted acc. to IEC)
Hole diameter	8.4 mm
Width	24 mm
Bolt diameter	8 mm
Screw thread	M8
Tightening torque	15 ... 20 Nm
Connection in acc. with standard	DIN 46235:1983-07
Cross section	25 mm ² ... 70 mm ²
Cross section range AWG	4 ... 00 (converted acc. to IEC)
Hole diameter	8.4 mm
Width	24 mm
Bolt diameter	8 mm
Screw thread	M8
Tightening torque	15 ... 20 Nm

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Identification color of ring cable lugs : blue	2.5 mm ²
	6 mm ²

Dimensions

Width	37 mm
-------	-------

Material specifications

Color	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

Electrical tests

Surge voltage test

Test voltage setpoint	9.8 kV
Result	Test passed

Temperature-rise test

Requirement temperature-rise test	Increase in temperature ≤ 45 K
Result	Test passed
	Test passed
Short-time withstand current 95 mm ²	11.4 kA
Result	Test passed

Power-frequency withstand voltage

Test voltage setpoint	2.2 kV
Result	Test passed

Mechanical properties

Mechanical data

Open side panel	No
-----------------	----

Mechanical tests

Mechanical strength

Result	Test passed
--------	-------------

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Attachment on the carrier

DIN rail/fixing support	NS 32/NS 35
Test force setpoint	15 N
Result	Test passed

Test for conductor damage and slackening

Rotation speed	10 (+/- 2) rpm
Revolutions	135
Conductor cross section/weight	95 mm ² /14 kg
Result	Test passed

Environmental and real-life conditions

Needle-flame test

Time of exposure	30 s
Result	Test passed

Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2022-06
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s ²) ² /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

Shocks

Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)

Ambient conditions

Ambient temperature (operation)	-60 °C ... 110 °C (Operating temperature range incl. self-heating; for max. short-term operating temperature, see RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (operation)	20 % ... 90 %
Permissible humidity (storage/transport)	30 % ... 70 %

Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
----------------------------------	---------------

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Mounting

Mounting type	NS 35/15
---------------	----------

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Drawings

Circuit diagram




RBO 8/WA120 - High-current connector

2130214

<https://www.phoenixcontact.com/in/products/2130214>

Schematic diagram

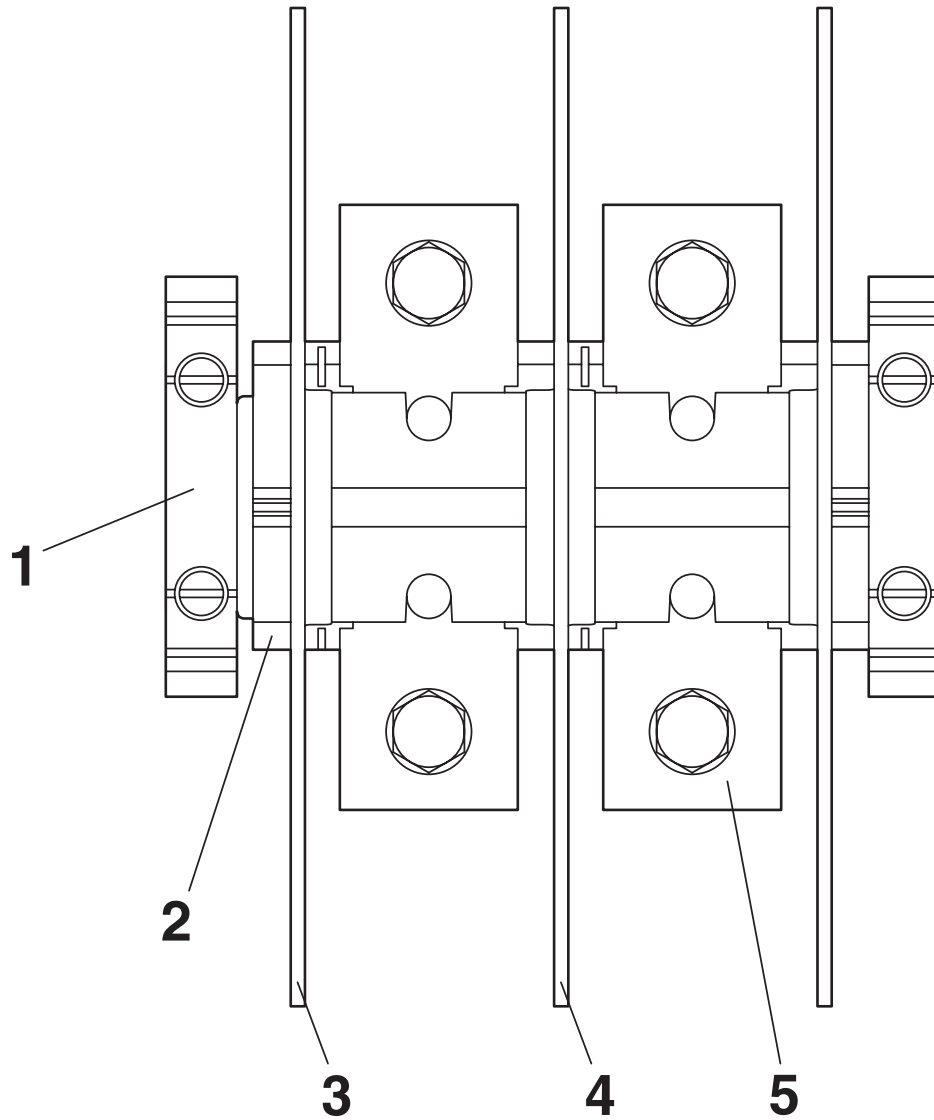

- 1 = E/AL-NS 35 end bracket
- 2 = UHV -E flange
- 3 = RBO-WA TP1
- 4 = RBO-WA TP1
- 5 = RBO high-current connector

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/in/products/2130214>

 cULus Recognized Approval ID: E60425				
	Nominal voltage U_N	Nominal current I_N	Cross section AWG	Cross section mm^2
Use group B				
	600 V	200 A	- 3/0	-
Use group C				
	600 V	200 A	- 3/0	-

RBO 8/WA120 - High-current connector



2130214

<https://www.phoenixcontact.com/in/products/2130214>

Classifications

ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250101

RBO 8/WA120 - High-current connector



2130214
<https://www.phoenixcontact.com/in/products/2130214>

Environmental product compliance

EU RoHS	
Fulfills EU RoHS substance requirements	Yes, No exemptions
China RoHS	
Environment friendly use period (EFUP)	EFUP-E
	No hazardous substances above the limits
EU REACH SVHC	
REACH candidate substance (CAS No.)	No substance above 0.1 wt%

Phoenix Contact 2024 © - all rights reserved
<https://www.phoenixcontact.com>

PHOENIX CONTACT (I) Pvt. Ltd.
A-58/2, Okhla Industrial Area, Phase - II, New Delhi-110 020

+91.1275.71420
info@phoenixcontact.co.in