







F21-2S/2D

F21-4S/4D


F21-E1

F21-4SB

F21-E1B

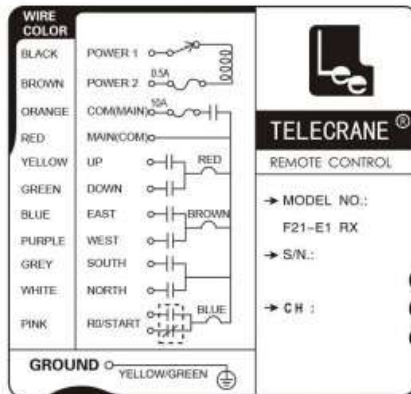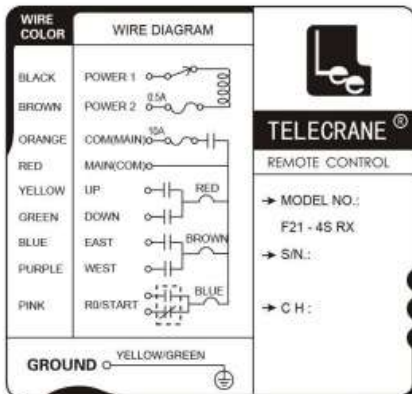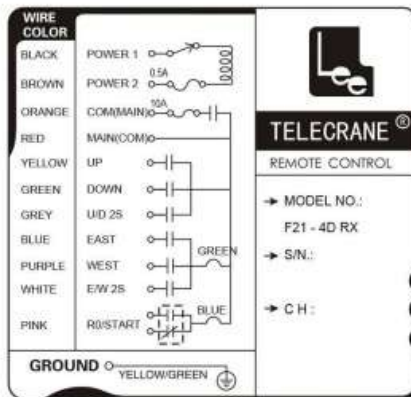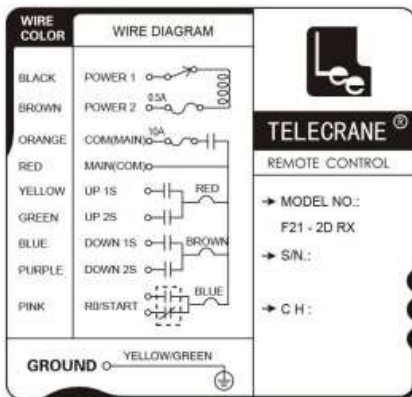

Activate Windows
Go to Settings to activate Windows.

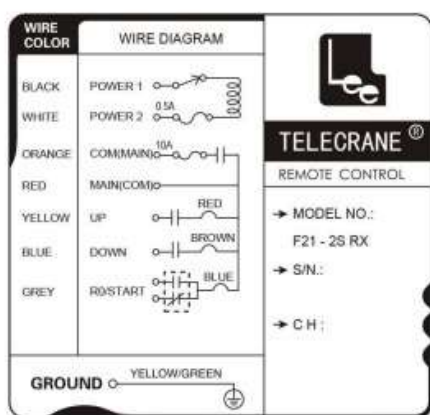

配件



Activate Windows
Go to Settings to activate Windows.





F21-2S/2D

F21-4S/4D

F21-E1

F21-4SB

F21-E1B

Features

Low Power Consumption(Eco-Friendly)

2 AA Size Batteries last up to 2 months in regular operation.

Enclosure Durability(Harsh Environment)

Nylon-Fiber made housing for extra shock resistant.

Windows Software

Programmable function setting through PC.

Pre-Wiring Receiver

Receiver pre-installed wire made the installation easy and fast ever.



F21-2S(S)

F21 Series SPEC.

Emission Power	<10mW
ID Code	4.3 billion(32 bits)
Operating Temp.	-35~80°C
Enclosure	Nylon Fiber
Operating Distance	Up to 100M
Transmitter Power	2 AA size Batteries

F21-2/4/E1/E1B Transmitter

Model	Weight	Dimension
F21-2S/2D	120g	130x45x22mm
F21-4/E1	265g	156x61x51mm
F21-4SB/E1B	380g	164x75x46mm

F21-2/4/E1/E1B Receiver

F21-2/4/E1/E1B	550g _(w/o cable)	185x85x85mm
F21-2S(S)	352g _(w/o cable)	84x82x48mm